


22B

B-Models enable better leverage of big and tall timber with extended tower and "arms down" design. They feature durable cast grab and accumulator arms, each operated independently, and an ultra-reliable disc drive with easily adjustable bearings.

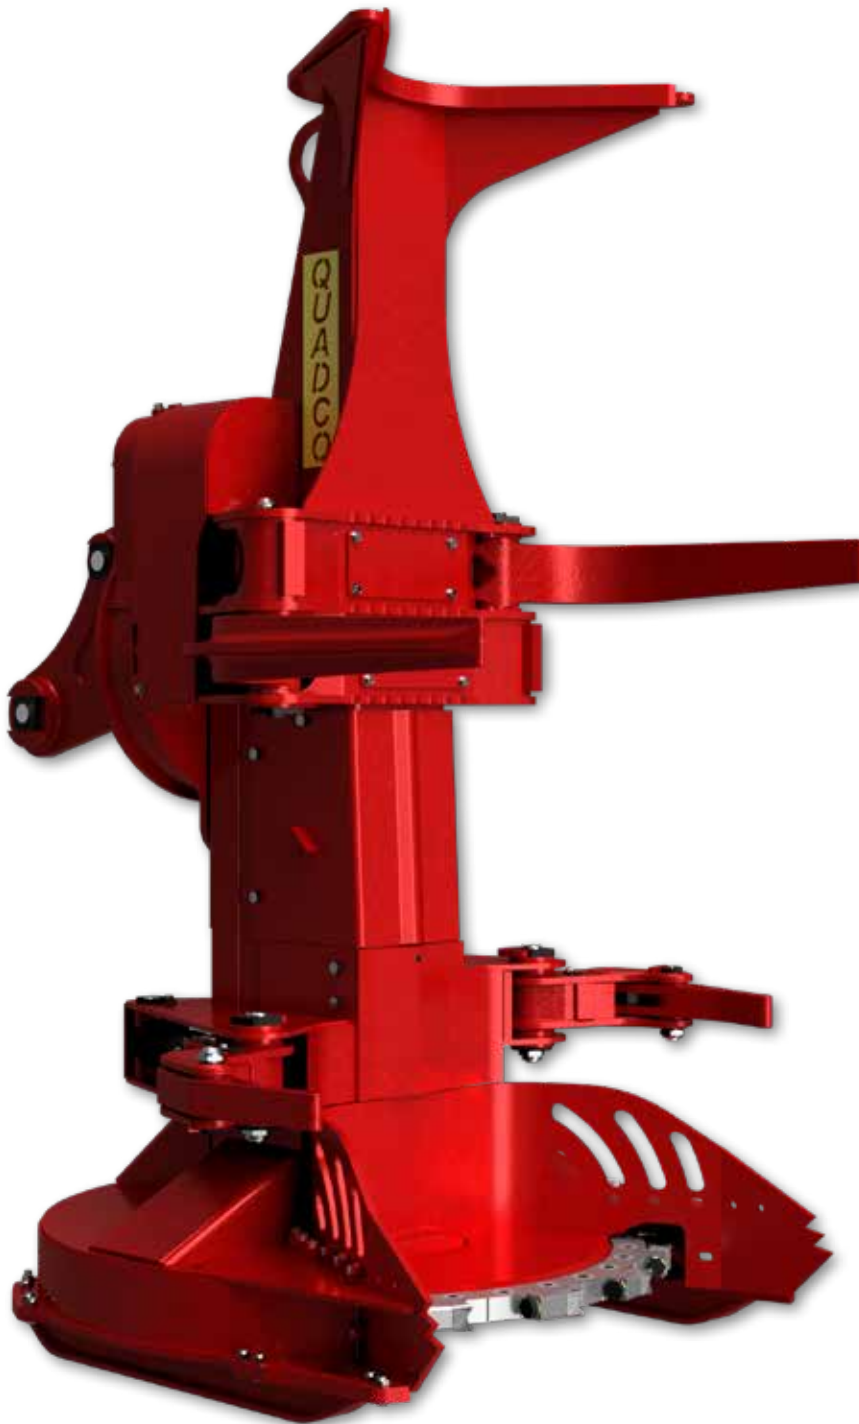

22B

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Rotation 40° (<i>High Torque</i>)	3,016 kg	6,650 lbs
	Rotation 360° HT	3,243 kg	7,125 lbs
	Height	2,972 mm	117"
	Width	1,638 mm	64.5"
	Depth	1,705 mm	67.12"
	Maximum Throat Opening	1,283 mm	50.5"
	Maximum Throat Opening @ Teeth	1,041 mm	41"
	Accumulation Area	0.45 m ²	4.8 ft ²
DISC	Cutting Capacity	559 mm	22"
	Tip-to-Tip Diameter	1,448 mm	57"
	Rated Saw Speed	1,150 rpm	
	Number of Teeth	16	
	Saw Kerf	59 mm	2 5/16"
	Weight (<i> HOLDERS & TEETH VARIES DEPENDING ON DISC</i>)	381 kg	840 lbs
	Style (<i>ONE PIECE OR SEGMENTED</i>)	Both	
HYD.	Cylinders (<i>DIAMETER</i>)		3" 3.5"
	Grab Arms	2 Cylinders	
	Accumulating Arms	2 Cylinders	