


## 24B

B-Models enable better leverage of big and tall timber with extended tower and "arms down" design. They feature durable cast grab and accumulator arms, each operated independently, and an ultra-reliable disc drive with easily adjustable bearings.

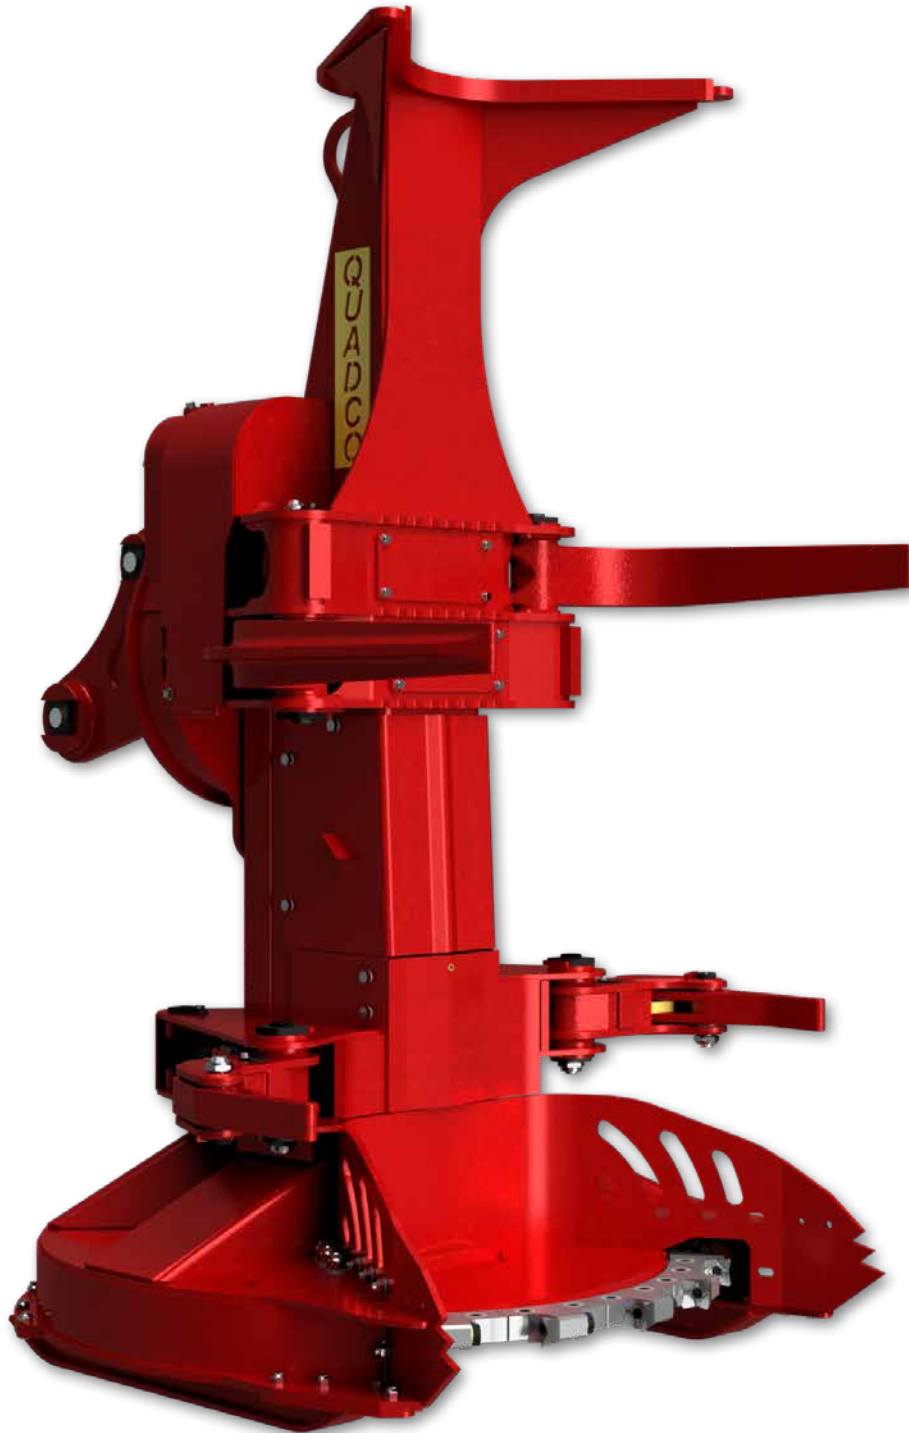

# 24B

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Rotation 40° ( <i>High Torque</i> )	3,130 kg	6,900 lbs
	Rotation 360° HT	3,266 kg	7,530 lbs
	Height	2,972 mm	117"
	Width	1,778 mm	70"
	Depth	1,803 mm	71"
	Maximum Throat Opening	1,321 mm	52"
	Maximum Throat Opening @ Teeth	1,092 mm	43"
	Accumulation Area	0.54 m <sup>2</sup>	5.8 ft <sup>2</sup>
DISC	Cutting Capacity	610 mm	24"
	Tip-to-Tip Diameter	1,549 mm	61"
	Number of Teeth	18	
	Saw Kerf	59 mm	2 1/2"
	Weight ( <i> HOLDERS &amp; TEETH   VARIES DEPENDING ON DISC</i> )	434 kg	956 lbs
	Style ( <i>One Piece or Segmented</i> )	Both	
HYD.	Cylinders ( <i>Diameter</i> )		3"   3.5"
	Grab Arms	2 Cylinders	
	Accumulating Arms	2 Cylinders	